

MX.47xx - 8 channel 16 bit A/D up to 500 kS/s

- **PXI 3U / CompactPCI 3U format**
- **8 channels with 16 bit resolution per card**
- **Versions with 100 kS/s up to 500 kS/s**
- **Simultaneously sampling on all channels**
- **Separate ADC and amplifier per channel**
- **complete on-board calibration**
- **8 input ranges: ± 50 mV up to ± 10 V**
- **Up to 64 MSample (128 MByte) on-board memory**
- **Sustained streaming mode up to 100 MB/s**
- **Window, pulse width, re-arm trigger**
- **OR/AND trigger combinations possible**
- **Synchronization possible**



Product range overview

Model	1 channel	2 channel	4 channel	8 channel
MX.4710	100 kS/s	100 kS/s	100 kS/s	100 kS/s
MX.4720	250 kS/s	250 kS/s	250 kS/s	250 kS/s
MX.4730	500 kS/s	500 kS/s	500 kS/s	500 kS/s

Software/Drivers

A large number of drivers and examples are delivered with the board:


- Windows NT/2000 32 bit drivers
- Windows XP/Vista/7/8/10, 32 and 64 bit driver
- Linux 32bit and 64bit drivers
- SBench 6.x Base version for Windows and Linux
- Visual C++/Borland C++ Builder examples
- Borland Delphi examples
- Microsoft Visual Basic & Excel examples
- Python examples
- LabWindows/CVI examples
- LabVIEW - drivers and examples
- MATLAB - drivers and examples
- Other 3rd party drivers (e.g. VEE,DASYLab) are partly available upon request

General Information

The MX.47xx for the first time offers full 16 bit resolution synchronously on eight channels at high sampling rates. Every channel has its own amplifier and A/D converter. This eliminates the problems known from multiplexed systems like phase error between the channels or high crosstalk. Every input channel can be offset and gain calibrated by software using a high-precision onboard calibration source.

Three different models are available, each in a different speed grade. These versions are working with sampling rates of 100 kS/s, 250 kS/s or 500 kS/s. The boards can also be updated to a multi-channel system using the PXI backplane signals.

Hardware block diagram

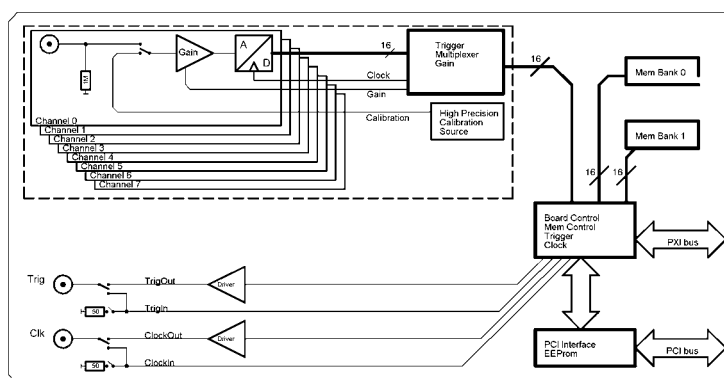

Software programmable parameters

Sampling rate	1 kS/s to max sampling rate, external clock, ref clock, PXI clock
Input range	± 50 mV, ± 100 mV, ± 250 mV, ± 500 mV, ± 1 V, ± 2 V, ± 5 V, ± 10 V
Clock mode	internal PLL, internal quartz, external, external divided, external reference clock, PXI reference clock
Clock impedance	50 Ohm / high impedance (> 4 kOhm)
Trigger impedance	50 Ohm / high impedance (> 4 kOhm)
Trigger mode	Channel, External, Software, Auto, Window, Pulse, PXI Line[5..0], PXI Startrigger
Trigger level resolution	14 bit
Trigger edge	rising edge, falling edge or both edges
Trigger pulsewidth	1 to 255 samples in steps of 1 sample
Memory depth	32 up to installed memory in steps of 32
Posttrigger	32 up to 128 M in steps of 32
Multiple Recording segmentsize	32 up to installed memory / 2 in steps of 32

Possibilities and options

PXI bus

The PXI bus (PCI eXtension for instrumentation) offers a variety of additional normed possibilities for synchronising different components in one system. It is possible to connect several Spectrum cards with each other as well as to connect a Spectrum card with cards of other manufacturers.


PXI reference clock

The card is able to use the 10 MHz reference clock that is supplied by the PXI system. Enabled by software the PXI reference clock is fed in the on-board PLL. This feature allows the cards to run with a fixed phase relation.

PXI trigger

The Spectrum cards support star trigger as well as the PXI trigger bus. Using a simple software command one or more trigger lines can be used as trigger source. This feature allows the easy setup of OR connected triggers from different cards.

Input Amplifier




The analog inputs can easily be adapted to real world signals using settings that are individual for each channel. By using software commands one can select a matching input range.

Automatic on-board calibration

All of the channels are calibrated in factory before the board is shipped. To compensate for different variations like PC power supply, temperature and aging, the software driver provides routines for an automatic onboard offset and gain calibration of all input ranges. All the cards contain a high precision on-board calibration reference.

Ring buffer mode



The ring buffer mode is the standard mode of all oscilloscope instruments. Digitized data is continuously written into a ring memory until a

trigger event is detected. After the trigger, post-trigger samples are recorded and pre-trigger samples can also be stored. The number of pre-trigger samples available simply equals the total ring memory size minus the number of post trigger samples.

FIFO mode

The FIFO mode is designed for continuous data transfer between measurement board and PC memory (up to 100 MB /s) or hard disk (up to 50 MB/s). The control of the data stream is done automatically by the driver on interrupt request.

Channel trigger

The data acquisition boards offer a wide variety of trigger modes. Besides the standard signal checking for level and edge as known from oscilloscopes it's also possible to define a window trigger. All trigger modes can be combined with the pulsewidth trigger. This makes it possible to trigger on signal errors like too long or too short pulses.

External trigger I/O


All instruments can be triggered using an external TTL signal. It's possible to use positive or negative edge also in combination with a programmable pulse width. An internally recognised trigger

event can - when activated by software - be routed to the trigger connector to start external instruments.

Pulse width


Defines the minimum or maximum width that a trigger pulse must have to generate a trigger event. Pulse width can be combined with channel trigger, pattern trigger and external trigger.

Multiple Recording



The Multiple Recording mode allows the recording of several trigger events without restarting the hardware. With this option very fast repetition rates can be achieved. The on-board memory is divided in several segments of same size. Each of them is filled with data if a trigger event occurs.

Gated Sampling




The Gated Sampling mode allows data recording controlled by an external gate signal. Data is only recorded if the gate signal has a programmed level.

External clock I/O


Using a dedicated connector a sampling clock can be fed in from an external system. It's also possible to output the internally used sampling clock to synchronise external equipment to this clock.

Reference clock



The option to use a precise external reference clock (typically 10 MHz) is necessary to synchronize the instrument for high-quality measurements with external equipment (like a signal source). It's also possible to enhance the stability of the sampling clock in this way. The driver automatically generates the requested sampling clock from the fed in reference clock.

SBench 6

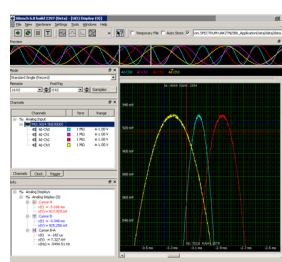

A base license of SBench 6, the easy-to-use graphical operating software for Spectrum cards, is included in the delivery. The base license makes it possible to test the card, display acquired data and make some basic measurements. It's a valuable tool for checking the card's performance and assisting with the unit's initial setup. The cards also come with a demo license for the SBench 6 professional version. This license gives the user the opportunity to test the additional features of the professional version with their hardware. The professional version contains several advanced measurement functions, such as FFTs and X/Y display, import and export utilities as well as support for all acquisition modes including data streaming. Data streaming allows the cards to continuously acquire data and transfer it directly to the PC RAM or hard disk. SBench 6 has been optimized to handle data files of several GBytes. SBench 6 runs under Windows as well as Linux (KDE, GNOME and Unity) operating systems. A test version of SBench 6 can be downloaded directly over the internet and can run the professional version in a simulation mode without any hardware installed. Existing customers can also request a demo license for the professional version from Spectrum. More details on SBench 6 can be found in the SBench 6 data sheet.

Technical Data

Analog Inputs

Resolution	16 bit (± 32000 values)
Differential non linearity (DNL)	± 1 LSB (ADC)
Integral non linearity (INL)	± 3 LSB (ADC)
Offset error (full speed)	$\leq 0.1\%$ of range (after warm-up and calibration)
Gain error (full speed)	$\leq 0.1\%$ (after warm-up and calibration)
Fixed input mode	bipolar
Crosstalk: all ranges 100 kHz signal	-100 dB
Analog Input impedance	1 MOhm against GND
Over voltage protection	± 30 V all ranges (activated card)
Aliasing filter	Butterworth filter 2nd order

Connector (analog)	MMCX female
Connector (trigger/clock)	3 mm SMB male

Power consumption (max speed)	3,3 V	5 V	-12 V	+12 V	Total
MX.47x0 (32 MS memory)	1.0 A	1.6 A	-	-	11.3 W
MX.4731 (64 MS memory), max power	1.4 A	1.6 A	-	-	12.6 W

Min internal clock	1 kS/s
Min external clock	DC

Trigger input: Standard TTL level	Low: $-0.5 > \text{level} < 0.8$ V High: $2.0 \text{ V} > \text{level} < 5.5$ V Trigger pulse must be valid ≥ 2 clock periods.
Trigger output	Standard TTL, capable of driving 50 Ohm. Low < 0.4 V (@ 20 mA, max 64 mA) High > 2.4 V (@ -20 mA, max -48 mA) One positive edge after the first internal trigger

Ext. clock: delay to internal clock	42 ns \pm 2 ns
-------------------------------------	------------------

Trigger

Multi: Trigger to 1st sample delay	fixed
Multi: Recovery time	< 20 samples
ext. Trigger accuracy	1 Sample
int. Trigger accuracy	1 Sample
input signal with 50 ohm termination	max 5 V rms
Trigger output delay	1 Sample

Environmental and Physical details

Dimension	160 mm x 100 mm (Standard 3U)
Width (standard board)	1 slot
Warm up time	10 minutes
Operating temperature	0°C to 50°C
Storage temperature	-10°C to 70°C
Humidity	10% to 90%
MTBF	80000 hours

Certifications and Compliances

EMC Immunity	Compliant with CE Mark
EMC Emission	Compliant with CE Mark

Clock input: Standard TTL level	Low: $-0.5 \text{ V} > \text{level} < 0.8 \text{ V}$ High: $2.0 \text{ V} > \text{level} < 5.5 \text{ V}$ Rising edge. Duty cycle: 50% \pm 5%
Clock output	Standard TTL, capable of driving 50 Ohm Low $< 0.4 \text{ V}$ (@ 20 mA, max 64 mA) High $> 2.4 \text{ V}$ (@ -20 mA, max -48 mA)

Dynamic Parameters

	MX.4710	MX.4720	MX.4730
max internal or external clock	100 kS/s	250 kS/s	500 kS/s
-3 dB bandwidth	> 50 kHz	> 125 kHz	> 250 kHz
RMS zero noise level ($\geq \pm 500$ mV)	< 0.7 LSB	< 0.8 LSB	< 0.9 LSB
RMS zero noise level ($< \pm 500$ mV)	< 6 μ V	< 7 μ V	< 10 μ V
Test - sampling rate	100 kS/s	250 kS/s	500 kS/s
Test signal frequency	10 kHz	10 kHz	10 kHz
SNR (typ)	91.5 dB	90.6 dB	88.7 dB
THD (typ)	-101.3 dB	-100.5 dB	-92.5 dB
SFDR (typ), excl. harm.	108.8 dB	106.7 dB	104.5 dB
ENOB (based on SNR)	14.9 bit	14.7 bit	14.4 bit
ENOB (based on SINAD)	14.7 bit	14.6 bit	14.3 bit

Dynamic parameters are measured at ± 5 V input range (if no other range is stated) and 1 MOhm termination with the sampling rate specified in the table. Measured parameters are averaged 20 times to get typical values. Test signal is a pure sine wave of the specified frequency with $> 99\%$ amplitude. SNR and RMS noise parameters may differ depending on the quality of the used PC. SNR = Signal to Noise Ratio, THD = Total Harmonic Distortion, SFDR = Spurious Free Dynamic Range, SINAD = Signal Noise and Distortion, ENOB = Effective Number of Bits. For a detailed description please see application note 002.

Order Information

The card is delivered with 32 MSample on-board memory and supports standard mode (Scope) and FIFO mode (streaming). Operating system drivers for Windows/Linux 32 bit and 64 bit, examples for C/C++, LabVIEW (Windows), MATLAB (Windows), LabWindows/CVI, Delphi, Visual Basic, Python and a Base license of the oscilloscope software SBench 6 are included. Drivers for other 3rd party products like VEE or DASyLab may be available on request.

Adapter cables are not included. Please order separately!

Versions

Order no.	Standard mem	1 channel	2 channels	4 channels	8 channels
MX.4710	32 MSample	100 kS/s	100 kS/s	100 kS/s	100 kS/s
MX.4720	32 MSample	250 kS/s	250 kS/s	250 kS/s	250 kS/s
MX.4730	32 MSample	500 kS/s	500 kS/s	500 kS/s	500 kS/s

Memory

Order no.	Option
MX.4xxx-64M	Memory upgrade to 64 MSample (128 MB) of total memory
MX.4xxx-up	Additional fee for later memory upgrade

Cables

for Connections	Length	Order no.				
		to BNC male	to BNC female	to SMA male	to SMA female	to SMB female
Analog Inputs	80 cm	Cab-1m-9m-80	Cab-1m-9f-80	Cab-1m-3mA-80	Cab-1m-3fA-80	Cab-1m-3f-80
Analog Inputs	200 cm	Cab-1m-9m-200	Cab-1m-9f-200	Cab-1m-3mA-200	Cab-1m-3fA-200	Cab-1m-3f-200
Probes (short)	5 cm		Cab-1m-9f-5			
Trigger/Clock I/O	80 cm	Cab-3f-9m-80	Cab-3f-9f-80	Cab-3f-3mA-80	Cab-3f-3fA-80	Cab-3f-3f-80
Trigger/Clock I/O	200 cm	Cab-3f-9m-200	Cab-3f-9f-200	Cab-3f-3mA-200	Cab-3f-3fA-200	Cab-3f-3f-200

Software SBench6

Order no.	
SBench6	Base version included in delivery. Supports standard mode for one card.
SBench6-Pro	Professional version for one card: FIFO mode, export/import, calculation functions
SBench6-Multi	Option multiple cards: Needs SBench6-Pro. Handles multiple synchronized cards in one system.
Volume Licenses	Please ask Spectrum for details.

Technical changes and printing errors possible

SBench, digitizerNETBOX and generatorNETBOX are registered trademarks of Spectrum Instrumentation GmbH. Microsoft, Visual C++, Visual Basic, Windows, Windows 98, Windows NT, Window 2000, Windows XP, Windows Vista, Windows 7, Windows 8 and Windows 10 are trademarks/registered trademarks of Microsoft Corporation. LabVIEW, DASyLab, Diadem and LabWindows/CVI are trademarks/registered trademarks of National Instruments Corporation. MATLAB is a trademark/registered trademark of The Mathworks, Inc. Delphi and C++Builder are trademarks/registered trademarks of Embarcadero Technologies, Inc. Keysight VEE, VEE Pro and VEE OneLab are trademarks/registered trademarks of Keysight Technologies, Inc. FlexPro is a registered trademark of Weisang GmbH & Co. KG. PCIe, PCI Express and PCI-X and PCI-SIG are trademarks of PCI-SIG. LXI is a registered trademark of the LXI Consortium. PICMG and CompactPCI are trademarks of the PCI Industrial Computer Manufacturers Group. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. AMD and Opteron are trademarks or registered trademarks of Advanced Micro Devices. NVIDIA, CUDA, GeForce, Quadro and Tesla are trademarks/registered trademarks of NVIDIA Corporation.