

M3i.21xx - 8 bit transient recorder up to 1 GS/s

- Up to 1 GS/s on one channel or 500 MS/s on two channels
- Simultaneously sampling on all channels
- Separate monolithic ADC and amplifier per channel
- 8 input ranges: ± 50 mV up to ± 10 V
- Programmable input offset $\pm 100\%$
- Up to 2 GSample (2 GByte) on-board memory
- 512 MSample standard memory installed
- Window, re-arm, OR/AND trigger
- Synchronization of up to 8 cards per system
- Acquisition Modes: Streaming, Multiple Recording, Timestamps

Speed	SNR	ENOB
500 MS/s	up to 46.0 dB	up to 7.3 LSB
1 GS/s	up to 44.9 dB	up to 7.2 LSB



- 66 MHz 32 bit PCI-X interface
- 5V / 3.3V PCI compatible
- 100% compatible to conventional PCI > V2.1
- Sustained streaming mode up to 245 MB/s

- 2,5 GBit x1 PCIe Interface
- Works with x1/x4/x8/x16* PCIe slots
- Software compatible to PCI
- Sustained streaming mode up to 160 MB/s

Operating Systems	Recommended Software	Drivers
<ul style="list-style-type: none"> • Windows 7 (SP1), 8, 10, Server 2008 R2 and newer • Linux Kernel 2.6, 3.x, 4.x, 5.x • Windows/Linux 32 and 64 bit 	<ul style="list-style-type: none"> • Visual C++, Delphi, C++ Builder, GNU C++, VB.NET, C#, J#, Java, Python • SBench 6 	<ul style="list-style-type: none"> • MATLAB • LabVIEW • LabWindows/CVI

Model	1 channel	2 channels
M3i.2120	500 MS/s	
M3i.2122	500 MS/s	250 MS/s
M3i.2130	1 GS/s	
M3i.2132	1 GS/s	500 MS/s

General Information

The 4 models of the M3i.21xx series are designed for the very fast data acquisition. Each of the input channels has its own monolithic A/D converter and its own programmable input amplifier. This allows to record signals simultaneously on both channels with 8 bit resolution without any phase delay between them. The extremely large on-board memory allows long time recording even with the highest sampling rates. All boards of the M3i.21xx series may use the whole installed on-board memory for the currently activated number of channels. A FIFO mode is also integrated on the board. This allows the acquisition of data continuously for online processing or for data storage to hard disk.

*Some x16 PCIe slots are for the use of graphic cards only and can not be used for other cards.

Software Support

Windows drivers


The cards are delivered with drivers for Windows 7, Windows 8 and Windows 10 (32 bit and 64 bit). Programming examples for Visual C++, C++ Builder, LabWindows/CVI, Delphi, Visual Basic, VB.NET, C#, J#, Python, Java and IVI are included.

Linux Drivers



All cards are delivered with full Linux support. Pre compiled kernel modules are included for the most common distributions like Fedora, Suse, Ubuntu LTS or Debian. The Linux support includes SMP systems, 32 bit and 64 bit systems, versatile programming examples for GNU C++, Python as well as the possibility to get the driver sources for your own compilation.

SBench 6

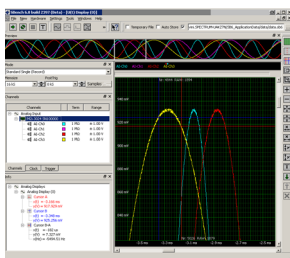

A base license of SBench 6, the easy-to-use graphical operating software for Spectrum cards, is included in the delivery. The base license makes it possible to test the card, display acquired data and make some basic measurements. It's a valuable tool for checking the card's performance and assisting with the unit's initial setup. The cards also come with a demo license for the SBench 6 professional version. This license gives the user the opportunity to test the additional features of the professional version with their hardware. The professional version contains several advanced measurement functions, such as FFTs and X/Y display, import and export utilities as well as support for all acquisition modes including data streaming. Data streaming allows the cards to continuously acquire data and transfer it directly to the PC RAM or hard disk. SBench 6 has been optimized to handle data files of several GBytes. SBench 6 runs under Windows as well as Linux (KDE, GNOME and Unity) operating systems. A test version of SBench 6 can be downloaded directly over the internet and can run the professional version in a simulation mode without any hardware installed. Existing customers can also request a demo license for the professional version from Spectrum. More details on SBench 6 can be found in the SBench 6 data sheet.

Third-party products

Spectrum supports the most popular third-party software products such as LabVIEW, MATLAB or LabWindows/CVI. All drivers come with detailed documentation and working examples are included in the delivery. Support for other software packages, like VEE or DasyLab, can also be provided on request.

Hardware features and options

PCI/PCI-X



The cards with PCI/PCI-X bus connector use 32 Bit and up to 66 MHz clock rate for data transfer. They are 100% compatible to Conventional PCI > V2.1. The universal interface allows the use in PCI slots with 5 V I/O and 3.3 V I/O voltages as well as in PCI-

X or PCI 64 slots. The maximum sustained data transfer rate is 245 MByte/s per bus segment.

PCI Express



The cards with PCI Express use a x1 PCIe connector. They can be used in PCI Express x1/x4/x8/x16 slots, except special graphic card slots, and are 100% software compatible to Conventional PCI > V2.1. The maximum sustained data transfer rate is

160 MByte/s per slot.


SMA connectors



Out.

As an alternative to the standard SMB and MMCX connections the card can also be equipped with SMA connectors. The SMA connections are available for the analog input signals (option -SMAM) or for the analog inputs as well as for two of the additional connections (option -SMA). These connections must be defined on the purchase order of the -SMA option and can be a selection of: Trig-In, Trig-Out, Multi-Purpose X0, Clk-In, Clk-

Input Amplifier



The analog inputs can be adapted to real world signals using a wide variety of settings that are individual for each channel. By using software commands the input termination can be changed

between 50 Ohm and 1 MOhm, one can select a matching input range and the signal offset can be compensated for.

Software selectable input path

For each of the analog channels the user has the choice between two analog input paths, both offering the highest flexibility when it comes to input ranges. The „Buffered“ path has a fixed 1 MOhm termination, that allows to connect standard oscilloscope probes to the card. The „50 Ohm“ path on the other hand provides the highest bandwidth and the best signal integrity having a fixed 50 Ohm termination.


Software selectable lowpass filter

Each analog channel contains a software selectable low-pass filter to limit the input bandwidth. Reducing the analog input bandwidth results in a lower total noise and can be useful especially with low voltage input signals.

Automatic on-board calibration

Every channel of each card is calibrated in the factory before the board is shipped. However, to compensate for environmental variations like PC power supply, temperature and aging the software driver includes routines for automatic offset and gain calibration. This calibration is performed on all input ranges of the "Buffered" path and uses a high precision onboard calibration reference.

Ring buffer mode



The ring buffer mode is the standard mode of all oscilloscope instruments. Digitized data is continuously written into a ring memory until a

trigger event is detected. After the trigger, post-trigger samples are recorded and pre-trigger samples can also be stored. The number of pre-trigger samples available simply equals the total ring memory size minus the number of post trigger samples.

FIFO mode

The FIFO mode is designed for continuous data transfer between measurement board and PC memory (up to 245 MB/s on a PCI-X slot, up to 125 MB/s on a PCI slot and up to 160 MB/s on a PCIe

slot) or hard disk. The control of the data stream is done automatically by the driver on interrupt request. The complete installed on-board memory is used for buffer data, making the continuous streaming extremely reliable.

Channel trigger

The digitizers offer a wide variety of trigger modes. These include a standard triggering mode based on a signals level and slope, like that found in most oscilloscopes. It is also possible to define a window mode, with two trigger levels, that enables triggering when signals enter or exit the window. Each input has its own trigger circuit which can be used to setup conditional triggers based on logical AND/OR patterns. All trigger modes can be combined with a re-arming mode for accurate trigger recognition even on noisy signals.

External trigger input


All boards can be triggered using an external analog or digital signal. It's possible to use positive or negative edge. As two analog comparators are used, one can also define a window trigger, a hysteresis trigger or a re-arm trigger.

Universal Multi-Purpose I/Os



All M3i cards offer two universal multi-purpose I/O lines, which can be separately programmed as either input or output. These lines can be used as additional TTL trigger inputs for more complex trigger conditions. When used as outputs, these lines can be used to output card status signals like trigger-armed or to output the trigger to synchronize external equipment.


Multiple Recording



The Multiple Recording mode allows the recording of several trigger events with an extremely short re-arming time. The hardware doesn't need to be restarted in between.

The on-board memory is divided in several segments of the same size. Each of them is filled with data if a trigger event occurs. Pre- and posttrigger of the segments can be programmed. The number of acquired segments is only limited by the used memory and is unlimited when using FIFO mode.


ABA mode

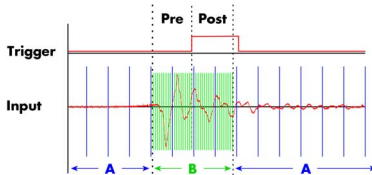

The ABA mode combines slow continuous data recording with fast acquisition on trigger events. The ABA mode works like a slow data logger combined with a fast digitizer. The exact position of the trigger events is stored as timestamps in an extra memory.

The exact position of the trigger events is stored as timestamps in an extra memory.

Timestamp




The timestamp function writes the time positions of the trigger events in an extra memory. The timestamps are relative to the start of recording, a defined zero time, externally synchronized to a radio clock, an IRIG-B or a GPS receiver.

Using the external synchronization gives a precise time relation for acquisitions of systems on different locations.

External clock input and output

Using a dedicated connector a sampling clock can be fed in from an external system. Additionally it's also possible to output the internally used sampling clock on a separate connector to synchronize external equipment to this clock.

Reference clock



The option to use a precise external reference clock (normally 10 MHz) is necessary to synchronize the instrument for high-quality measurements with external equipment (like a signal source). It's also possible to enhance the quality of the sampling clock in this way. The driver automatically generates the requested sampling clock from the fed in reference clock.


Star-Hub



The star-hub is an additional module allowing the phase stable synchronization of up to 8 boards of a kind in one system. Independent of the number of boards there is no phase delay between all channels. The star-hub distributes trigger and

clock information between all boards. As a result all connected boards are running with the same clock and the same trigger. All trigger sources can be combined with a logical OR allowing all channels of all cards to be trigger source at the same time.

BaseXIO (Asynchronous I/O, enhanced timestamps)



The BaseXIO option offers 8 asynchronous digital I/O lines on the base card, which are available on a separate bracket as SMB connectors. The direction can be selected by software in groups of four.

This allows e.g. external equipment control or status monitoring. In addition one of the I/O lines can be used as reference clock for the Timestamp counter.

External Amplifiers



For the acquisition of extremely small voltage levels with a high bandwidth a series of external amplifiers is available. Each of the one channel amplifiers is working with a fixed input impedance and allows - depending on the bandwidth - to select different amplification levels between x10 (20 dB) up to x1000 (60 dB). Us-

ing the external amplifiers of the SPA series voltage levels in the uV and mV area can be acquired.

Technical Data

Analog Inputs

Resolution		8 bit	
Input Type		Single-ended	
Input Offset	software programmable	±100% of selected input range in step of 1%	
ADC Differential non linearity (DNL)	ADC only	≤ 0.6 LSB	
ADC Integral non linearity (INL)	ADC only	≤ 1.0 LSB	
ADC Bit Error Rate (BER)	sampling rate 500 MS/s	10 ⁻¹⁸	
Channel selection	software programmable	1 or 2 channels (maximum is model dependent)	
Bandwidth filter	activate by software	20 MHz bandwidth with 3rd order Butterworth filtering	
Input Path Types	software programmable	50 Ω (HF) Path	Buffered (high impedance) Path
Analog Input impedance		50 Ω	1 MΩ 25 pF
Input Ranges	software programmable	±50 mV, ±100 mV, ±200 mV, ±500 mV, ±1 V, ±2 V, ±5 V, ±10 V	
Input Coupling	software programmable	AC/DC	AC/DC
Offset error (full speed)	after warm-up and calibration	≤ 0.5%	≤ 0.5%
Gain error (full speed)	after warm-up and calibration	≤ 1.0%	≤ 0.5%
Over voltage protection	range ≤ ±1V	3.5 Vrms	±5 V
Over voltage protection	range ≥ ±2V	5 Vrms	±30 V
Max DC voltage if AC coupling active		±30 V	±30 V
Relative input stage delay		Bandwidth filter disabled: 0 ns Bandwidth filter enabled: 14.7 ns	Bandwidth filter disabled: 2.5 ns Bandwidth filter enabled: 17.2 ns
Relative input stage delay		0 ns	2.5 ns
Crosstalk 100 MHz sine signal	input range ±1 V	≤ -75 dB	≤ -75 dB
Crosstalk 250 MHz sine signal	input range ±1 V	≤ -55 dB	not available

Trigger

Available trigger modes	software programmable	Channel Trigger, Ext0 (Analog), Ext1 (TT), Software, Window, Re-Arm, Or/And, Delay	
Trigger level resolution	software programmable	8 bit	
Trigger edge	software programmable	Rising edge, falling edge or both edges	
Trigger delay	software programmable	0 to (8GSamples - 16) = 8589934576 Samples in steps of 16 samples < 64 samples (+ programmed pretrigger)	
Multi, Gate: re-arming time			
Pretrigger at Multi, ABA, Gate, FIFO	software programmable	16 up to [16 kSamples / number of active channels] in steps of 16	
Posttrigger	software programmable	16 up to 8 GSamples in steps of 16 [defining pretrigger in standard scope mode]	
Memory depth	software programmable	32 up to [installed memory / number of active channels] samples in steps of 16	
Multiple Recording/ABA segment size	software programmable	32 up to [installed memory / 2 / active channels] samples in steps of 32	
Trigger output delay	after trigger input	261 sampling clock cycles	
Internal/External trigger accuracy		1 sample	
External trigger		Ext0 (Trg)	Ext1 (X0) + Ext2 (X1)
External trigger impedance	software programmable	50 Ω / 1 MΩ 25 pF	10 kΩ to 3.3 V
External trigger coupling	software programmable	AC or DC	fixed DC
Minimum trigger pulse width	(DC / AC)	≥ 2 samples	≥ 2 samples
External trigger bandwidth DC	50 Ω / 1 MΩ	DC to 200 MHz / 150 MHz	DC to 125 MHz
External trigger bandwidth AC	50 Ω	20 kHz to 200 MHz	n.a.
External trigger type		Window comparator, ±5 V	TTL level
External trigger level	software programmable	2 levels ±5V in steps of 1 mV	fixed: Low: ≤0.8 V, High: ≥2.0 V
External trigger maximum voltage		5V rms (50 Ω), ±30V (1 MΩ)	-0.3 V to +5.5V
External trigger output impedance		input only	50 Ω
External trigger output levels		input only	Low: ≤0.4 V, High: ≥2.4 V
External trigger output type		input only	3.3 V LVTTTL compatible for high impedance
External trigger output drive strength		input only	Capable of driving 50 Ω loads, ±64 mA output

Clock

Clock Modes	software programmable	internal, external reference clock, sync	
Internal clock accuracy		≤ ±32 ppm	
Internal clock setup granularity		sample rates ≤ 500 MS/s: 1 Hz (except the clock setup gaps from below) sample rates > 500 MS/s: 2 Hz (except the clock setup gaps from below)	
Clock setup range gaps	clock not programmable	70 MHz to 72 MHz, 140 MHz to 144 MHz, 281 MHz to 287 MHz, 562 MHz to 574 MHz	
External reference clock range	software programmable	≥ 10 MHz and ≤ 1 GHz (fix at runtime)	
External reference clock setup granilarity		1 kHz	
External clock input impedance		50 Ω fixed	
External clock input coupling		AC coupling	
External clock input edge		Rising edge	
External clock input to internal ADC clock delay		3.7 ns (8.2 ns if synchronization is used)	
External clock input type		Single-ended, sine wave or square wave	
External clock input swing		0.3 V peak-peak up to 3.0 V peak-peak	
External clock input max DC voltage		±30 V (with max 3.0 V difference between low and high level)	
External clock input duty cycle requirement		40% to 60%	
External clock output type		Single-ended, 3.3V LVPECL	
External clock output coupling		AC coupling	
ABA mode clock divider for slow clock	software programmable	16 up to 256k - 16) in steps of 16	

	M3i.2120	M3i.2122	M3i.2130	M3i.2132
min sampling clock	22.5 MS/s	22.5 MS/s	22.5 MS/s	22.5 MS/s
max internal clock (1 channel active)	500 MS/s	500 MS/s	1 GS/s	1 GS/s
max internal clock (2 channels active)	n.a.	250 MS/s	n.a.	500 MS/s
lower bandwidth limit (DC coupling)	0 Hz	0 Hz	0 Hz	0 Hz
lower bandwidth limit (AC coupled, 50 Ohm)	<30 kHz	<30 kHz	<30 kHz	<30 kHz
lower bandwidth limit (AC coupled, 1 MOhm)	<2 Hz	<2 Hz	<2 Hz	<2 Hz
-3 dB bandwidth (buffered path)	150 MHz	150 MHz	200 MHz	200 MHz
-3 dB bandwidth (50 ohm path)	250 MHz	250 MHz	500 MHz	500 MHz
-3 dB bandwidth (BW limit enabled)	20 MHz	20 MHz	20 MHz	20 MHz

Multi Purpose I/O lines (front-plate)

Number of multi purpose lines		two, named X0, X1
Input: available signal types	software programmable	Trigger-In, Asynchronous Digital-In, Synchronous Digital-In, Timestamp Reference Clock
Input: impedance		10 k Ω to 3.3 V
Input: maximum voltage level		-0.3 V to +5.5V
Input: signal levels		Low: ≤ 0.8 V, High: ≥ 2.0 V
Output: available signal types	software programmable	Asynchronous Digital-Out, Trigger Output, Run, Arm
Output: impedance		50 Ω
Output: signal levels		Low: ≤ 0.4 V, High: ≥ 2.4 V
Output: type		3.3 V LVTTTL, TTL compatible for high impedance loads
Output: drive strength		Capable of driving 50 Ω loads, maximum strength ± 64 mA

BaseXIO Option

BaseXIO modes	software programmable	Asynch digital I/O, 2 additional trigger, timestamp reference clock, timestamp digital inputs
BaseXIO direction	software programmable	Each 4 lines can be programmed in direction
BaseXIO input		TTL compatible: Low ≤ 0.8 V, High ≥ 2.0 V
BaseXIO input impedance		4.7 k Ω towards 3.3 V
BaseXIO input maximum voltage		-0.5 V up to +5.5 V
BaseXIO output type		3.3 V LVTTTL
BaseXIO output levels		TTL compatible: Low ≤ 0.4 V, High ≥ 2.4 V
BaseXIO output drive strength		32 mA maximum current, no 50 Ω loads

Connectors (Standard Card)

Analog Inputs		3 mm SMB male (one for each single-ended input)	Cable-Type: Cab-3f-xx-xx
Trigger ExtIO Input		1 x MMCX female (one connector)	Cable-Type: Cab-1m-xx-xx
Clock Input/Output		2 x MMCX female (two connectors)	Cable-Type: Cab-1m-xx-xx
Multi Purpose X0 and X1		2 x MMCX female (two connectors)	Cable-Type: Cab-1m-xx-xx
Option BaseXIO		8 x 3 mm SMB male on extra bracket, internally 8 x MMCX female	

Connectors (Option M3i.xxxx-SMA)

Analog Inputs		SMA female (one for each single-ended input)	Cable-Type: Cab-3mA-xx-xx
Trigger, Clock I/O, Multi Purpose X0	signals specified at order time	2 x SMA female (two connectors)	Cable-Type: Cab-3mA-xx-xx
Option BaseXIO		8 x 3 mm SMB male on extra bracket, internally 8 x MMCX female	

Connectors (Option M3i.xxxx-SMAM)

Analog Inputs		SMA female (one for each single-ended input)	Cable-Type: Cab-3mA-xx-xx
Trigger ExtIO Input		1 x MMCX female (one connector)	Cable-Type: Cab-1m-xx-xx
Clock Input/Output		2 x MMCX female (two connectors)	Cable-Type: Cab-1m-xx-xx
Multi Purpose X0 and X1		2 x MMCX female (two connectors)	Cable-Type: Cab-1m-xx-xx
Option BaseXIO		8 x 3 mm SMB male on extra bracket, internally 8 x MMCX female	

Environmental and Physical Details

Dimension (PCB only)		312 mm x 107 mm (full PCI length)
Width (Standard or star-hub 4)		1 full size slot
Width (star-hub 8)		additionally back of adjacent neighbour slots
Width (with option BaseXIO)		additionally extra bracket on neighbour slot
Weight	plain card	320 g
Weight	plain card + option SH4	380g
Weight	plain card + option SH8	400g
Warm up time		10 minutes
Operating temperature		0°C to 50°C
Storage temperature		-10°C to 70°C
Humidity		10% to 90%

PCI/PCI-X specific details

PCI / PCI-X bus slot type
 PCI / PCI-X bus slot compatibility
 Sustained streaming mode

32 bit 33 MHz or 32 bit 66 MHz
 32/64 bit, 33-133 MHz, 3,3 V and 5 V I/O
 > 245 MB/s (in a PCI-X slot clocked at 66 MHz or higher)

PCI Express specific details

PCIe slot type
 PCIe slot compatibility
 Sustained streaming mode

x1 Generation 1
 x1/x4/x8/x16 (Some x16 PCIe slots are for graphic cards only and can not be used)
 > 160 MB/s

Certification, Compliance, Warranty

EMC Immunity
 EMC Emission
 Product warranty
 Software and firmware updates

Compliant with CE Mark
 Compliant with CE Mark
 5 years starting with the day of delivery
 Life-time, free of charge

Power Consumption

	PCI / PCI-X			PCI EXPRESS		
	3.3 V	5 V	Total	3.3V	12V	Total
M3i.21xx (512 MS memory)	2.3 A	2.3 A	19.1 W	0.4 A	2.0 A	25.3 W
M3i.21xx (4 GSamples memory), max power	2.4 A	3.3 A	24.4 W	0.4 A	2.7 A	33.7 W

MTBF

MTBF 200000 hours

Dynamic Parameters


Input Path	M3i.2130 and M3i.2132, 1 channel 1 GS/s (bandwidth 500 MHz)											
	HF path, AC coupled, fixed 50 Ohm, full BW						Buffered path, BW limit			Buffered path, full BW		
	9 MHz						9 MHz			9 MHz		
	±50mV	±100mV	±250mV	±500mV	±500mV	±500mV	±50mV	±250mV	±1V	±500mV	±500mV	±500mV
RMS Noise (zero level)	<0.5						<0.6	<0.5	<0.5	<0.4		
THD (typ) (dB)	-54.1	-54.0	-54.1	-54.2	-54.2	-54.3	-53.8	-54.1	-53.8	-54.1	-54.4	-52.5
SNR (typ) (dB)	44.5	44.8	44.9	44.9	44.7	44.6	44.3	44.6	43.5	44.4	44.7	43.9
SFDR (typ), excl. harm. (dB)	62.4	63.4	64.3	62.7	59.5	56.4	62.1	62.9	50.7	53.1	54.5	52.2
SFDR (typ), incl. harm. (dB)	55.3	55.2	55.1	55.3	55.8	56.2	55.4	55.0	50.6	53.0	54.3	52.1
SINAD/THD+N (typ) (dB)	44.0	44.2	44.2	44.2	44.2	44.1	43.9	44.1	43.0	43.9	44.1	43.4
ENOB based on SINAD (bit)	7.0	7.1	7.1	7.1	7.0	7.0	7.0	7.0	6.9	7.0	7.0	6.9
ENOB based on SNR (bit)	7.1	7.1	7.2	7.2	7.1	7.1	7.1	7.1	6.9	7.1	7.1	7.0

Input Path	M3i.2132, 2 channels 500 MS/s (bandwidth 500 MHz)											
	HF path, AC coupled, fixed 50 Ohm, full BW						Buffered path, BW limit			Buffered path, full BW		
	9 MHz						9 MHz			9 MHz		
	±50mV	±100mV	±250mV	±500mV	±500mV	±500mV	±50mV	±250mV	±1V	±500mV	±500mV	±500mV
RMS Noise (zero level)	<0.5						<0.6	<0.5	<0.5	<0.5		
THD (typ) (dB)	-54.6	-54.6	-54.6	-55.5	-55.1	-54.9	-54.5	-54.6	-54.5	-54.6	-55.6	-53.0
SNR (typ) (dB)	44.9	45.4	45.5	45.1	45.0	44.9	44.7	45.0	44.7	45.4	45.2	45.3
SFDR (typ), excl. harm. (dB)	63.0	63.5	63.5	65.6	65.3	62.3	63.1	63.5	63.5	63.5	64.7	64.9
SFDR (typ), incl. harm. (dB)	55.9	55.9	55.9	59.0	58.5	56.7	56.0	56.0	56.1	58.2	58.9	56.3
SINAD/THD+N (typ) (dB)	44.4	44.9	44.9	44.7	44.6	44.4	44.2	44.5	44.3	44.9	44.8	44.6
ENOB based on SINAD (bit)	7.1	7.2	7.2	7.1	7.1	7.1	7.1	7.1	7.1	7.2	7.1	7.1
ENOB based on SNR (bit)	7.2	7.2	7.3	7.2	7.2	7.1	7.1	7.2	7.1	7.3	7.2	7.2

Input Path	M3i.2120 and M3i.2122, 1 channel 500 MS/s or 2 channels 250 MS/s (bandwidth 250 MHz)											
	HF path, AC coupled, fixed 50 Ohm, full BW						Buffered path, BW limit			Buffered path, full BW		
	9 MHz						9 MHz			9 MHz		
	±50mV	±100mV	±250mV	±500mV	±500mV	±500mV	±50mV	±250mV	±1V	±500mV	±500mV	±500mV
RMS Noise (zero level) (LSB)	<0.4						<0.5	<0.4	<0.5	<0.4		
THD (typ) (dB)	-54.2	-54.2	-54.2	-53.1	-51.7	-52.8	-54.1	-54.1	-54.1	-54.1	-62.4	-50.4
SNR (typ) (dB)	45.8	46.0	46.0	46.0	46.1	45.8	45.4	45.8	45.5	46.0	45.7	45.4
SFDR (typ), excl. harm. (dB)	63.1	63.3	63.3	61.2	64.4	60.8	63.0	63.2	63.2	63.3	63.5	60.3
SFDR (typ), incl. harm. (dB)	55.6	55.6	55.6	52.8	52.6	53.7	55.6	55.5	55.6	55.5	53.3	53.0
SINAD/THD+N (typ) (dB)	45.1	45.3	45.3	45.2	45.0	45.0	44.8	45.2	44.9	45.3	44.8	44.2
ENOB based on SINAD (bit)	7.2	7.2	7.2	7.2	7.2	7.2	7.1	7.2	7.2	7.2	7.2	7.1
ENOB based on SNR (bit)	7.3	7.3	7.4	7.3	7.3	7.3	7.2	7.3	7.3	7.3	7.3	7.3

A pure sine wave with > 99% amplitude of input range is measured with 50 ohms termination. SNR and RMS noise parameters may differ depending on the quality of the used PC. SNR = Signal to Noise Ratio, THD = Total Harmonic Distortion, SFDR = Spurious Free Dynamic Range, SINAD = Signal Noise and Distortion, ENOB = Effective Number of Bits. For a detailed description please see application note 002.

Hardware block diagram

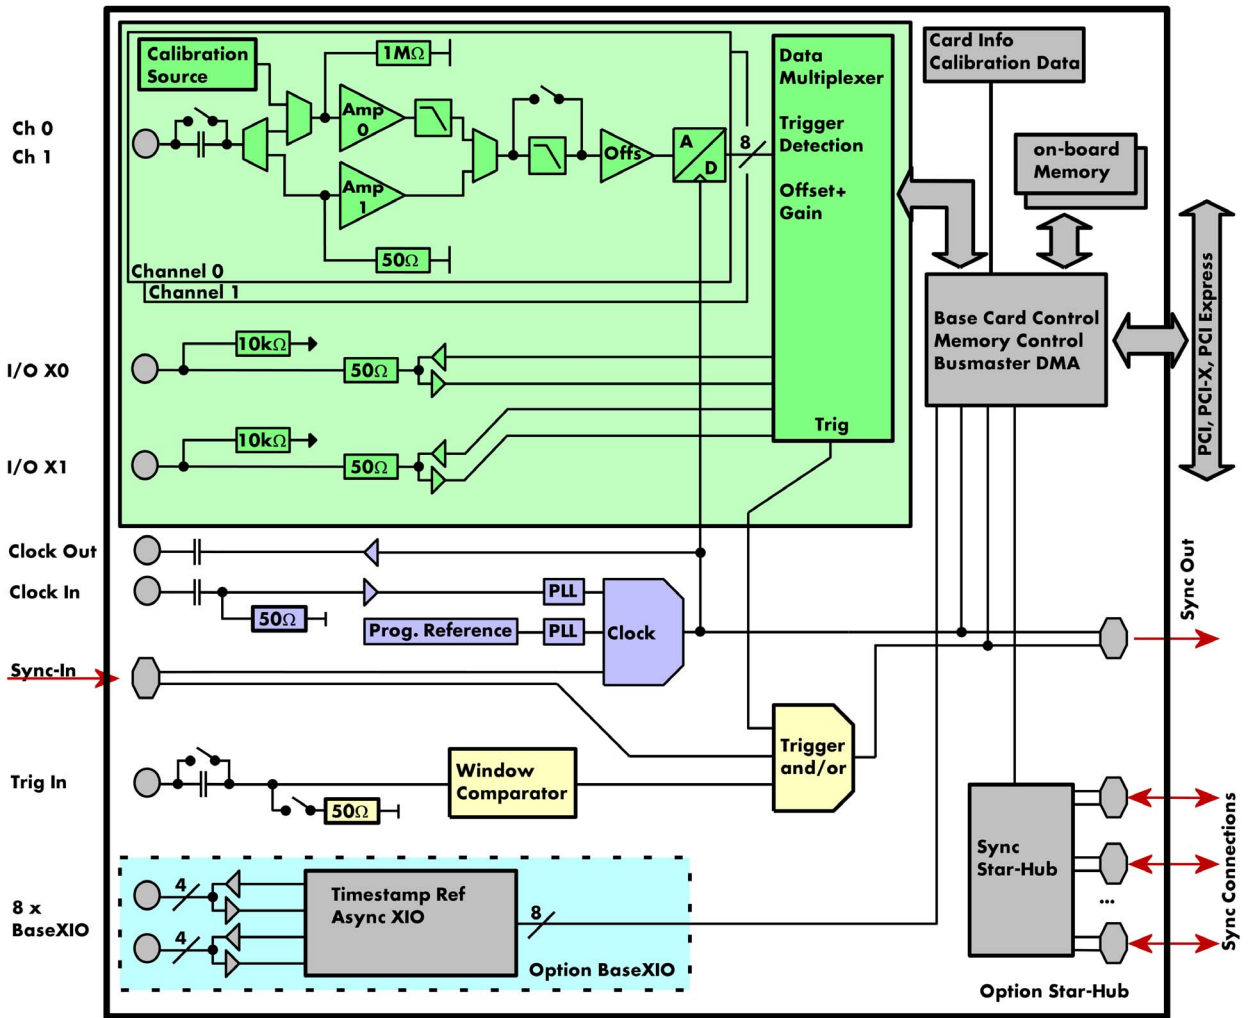

Order Information

The card is delivered with 512 MSample on-board memory and supports standard acquisition (Scope), FIFO acquisition (streaming), Multiple Recording, ABA mode and Timestamps. Operating system drivers for Windows/Linux 32 bit and 64 bit, examples for C/C++, LabVIEW (Windows), MATLAB (Windows and Linux), LabWindows/CVI, IVI, .NET, Delphi, Java, Python and a Base license of the oscilloscope software SBench 6 are included. Drivers for other 3rd party products like VEE or DASYLab may be available on request.

Adapter cables are not included. Please order separately!

PCI Express (PCIe) PCI/PCI-X	PCI Express	PCI/PCI-X	Standard mem	1 channel	2 channels
	M3i.2120-exp	M3i.2120	512 MByte	500 MS/s	
	M3i.2122-exp	M3i.2122	512 MByte	500 MS/s	250 MS/s
	M3i.2130-exp	M3i.2130	512 MByte	1 GS/s	
	M3i.2132-exp	M3i.2132	512 MByte	1 GS/s	500 MS/s

Memory	Order no.	Option
	M3i.xxxx-1GB	Memory upgrade to 1 GB of total memory
	M3i.xxxx-2GB	Memory upgrade to 2 GB of total memory

Options	Order no.	Option
	M3i.xxxx-SH4	Synchronization Star-Hub for up to 4 cards, only 1 slot width
	M3i.xxxx-SH8	Synchronization Star-Hub for up to 8 cards, 2 slots width
	M3i.xxxx-bxio	Option BaseXIO: 8 digital I/O lines usable as asynchronous I/O and timestamp ref-clock, additional bracket with 8 SMB connectors
	M3i.xxxx-SMA	Option SMA connections for all analog inputs + two control signals (fixed at order time): - SMA connection XA: Trigger-In or Trigger-Out/Multi Purpose X0 - SMA connection XB: Trigger-In or Clock In or Clock-Out
	M3i.xxxx-SMAM	Option SMA connections for all analog inputs + MMCX connections for all control signals (clock I/O, trigger I/O, multipurpose X0, X1)
	M3i-upgrade	Upgrade for M3i.xxxx: later installation of option -M3i.xxxx-2GB, -bxio, -SH4, SH8 or SMA connectors

Services	Order no.	
	Recal	Recalibration at Spectrum incl. calibration protocol

Standard Cables	for Connections	Length	Order no.				
			to BNC male	to BNC female	to SMA male	to SMA female	to SMB female
	Standard inputs	80 cm	Cab-3f-9m-80	Cab-3f-9f-80	Cab-3f-3mA-80	Cab-3f-3fA-80	Cab-3f-3f-80
	Standard inputs	200 cm	Cab-3f-9m-200	Cab-3f-9f-200	Cab-3f-3mA-200	Cab-3f-3fA-200	Cab-3f-3f-200
	Probes (short)	5 cm		Cab-3f-9f-5			
	Trigger/Clock/Extra	80 cm	Cab-1m-9m-80	Cab-1m-9f-80	Cab-1m-3mA-80	Cab-1m-3fA-80	Cab-1m-3f-80
	Trigger/Clock/Extra	200 cm	Cab-1m-9m-200	Cab-1m-9f-200	Cab-1m-3mA-200	Cab-1m-3fA-200	Cab-1m-3f-200
	SMA Option	80 cm	Cab-3mA-9m-80	Cab-3mA-9f-80	Cab-3mA-3mA-80		Cab-3f-3mA-80
	SMA Option	200 cm	Cab-3mA-9m-200	Cab-3mA-9f-200	Cab-3mA-3mA-200		Cab-3f-3mA-200
	Information	The standard adapter cables are based on RG174 cables and have a nominal attenuation of 0.3 dB/m at 100 MHz and 0.5 dB/m at 250 MHz. For high speed signals we recommend the low loss cables series CHF together with the SMA connector option M3i.xxxx-SMA oder M3i.xxxx-SMAM.					

Low Loss Cables	Order no.s	Option
	CHF-3mA-3mA-200	Low loss cables SMA male to SMA male 200 cm
	CHF-3mA-9m-200	Low loss cables SMA male to BNC male 200 cm
	Information	The low loss adapter cables are based on MF141 cables and have an attenuation of 0.3 dB/m at 500 MHz and 0.5 dB/m at 1.5 GHz. They are recommended for signal frequencies of 200 MHz and above. Card SMA connectors are needed. Make sure to order one of the options M3i.xxxx-SMA or M3i.xxxx-SMAM together with the card.

Amplifiers	Order no.	Bandwidth	Connection	Input Impedance	Coupling	Amplification
	SPA.1841 ⁽²⁾	2 GHz	SMA	50 Ohm	AC	x100 (40 dB)
	SPA.1801 ⁽²⁾	2 GHz	SMA	50 Ohm	AC	x10 (20 dB)
	SPA.1601 ⁽²⁾	500 MHz	BNC	50 Ohm	DC	x10 (20 dB)
	SPA.1412 ⁽²⁾	200 MHz	BNC	1 MOhm	AC/DC	x10/x100 (20/40 dB)
	SPA.1411 ⁽²⁾	200 MHz	BNC	50 Ohm	AC/DC	x10/x100 (20/40 dB)
	SPA.1232 ⁽²⁾	10 MHz	BNC	1 MOhm	AC/DC	x100/x1000 (40/60 dB)
	SPA.1231 ⁽²⁾	10 MHz	BNC	50 Ohm	AC/DC	x100/x1000 (40/60 dB)
	Information	External Amplifiers with one channel, BNC/SMA female connections on input and output, manually adjustable offset, manually switchable settings. An external power supply for 100 to 240 VAC is included. Please be sure to order an adapter cable matching the amplifier connector type and matching the connector type for your A/D card input.				

Software SBench6	Order no.	
	SBench6	Base version included in delivery. Supports standard mode for one card.
	SBench6-Pro	Professional version for one card: FIFO mode, export/import, calculation functions
	SBench6-Multi	Option multiple cards: Needs SBench6-Pro. Handles multiple synchronized cards in one system.
	Volume Licenses	Please ask Spectrum for details.

Software Options	Order no.	
	SPcRServer	Remote Server Software Package - LAN remote access for M2i/M3i/M4i/M4x/M2p cards

Technical changes and printing errors possible

SBench, digitizerNETBOX and generatorNETBOX are registered trademarks of Spectrum Instrumentation GmbH. Microsoft, Visual C++, Windows, Windows 98, Windows NT, Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8 and Windows 10 are trademarks/registered trademarks of Microsoft Corporation. LabVIEW, DASYLab, Diadem and LabWindows/CVI are trademarks/registered trademarks of National Instruments Corporation. MATLAB is a trademark/registered trademark of The Mathworks, Inc. Delphi and C++Builder are trademarks/registered trademarks of Embarcadero Technologies, Inc. Keysight VEE, VEE Pro and VEE OneLab are trademarks/registered trademarks of Keysight Technologies, Inc. FlexPro is a registered trademark of Weisang GmbH & Co. KG. PCIe, PCI Express and PCI-X and PCI-SIG are trademarks of PCI-SIG. LXI is a registered trademark of the LXI Consortium. PICMG and CompactPCI are trademarks of the PCI Industrial Computer Manufacturers Group. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Intel and Intel Core

i3, Core i5, Core i7, Core i9 and Xeon are trademarks and/or registered trademarks of Intel Corporation. AMD, Opteron, Sempron, Phenom, FX, Ryzen and EPYC are trademarks and/or registered trademarks of Advanced Micro Devices. NVIDIA, CUDA, GeForce, Quadro and Tesla are trademarks/registered trademarks of NVIDIA Corporation.